


Model 9900^{RM} Gas Analyzer

Features and Benefits

- || Economical, rugged single or multi-gas analysis (up to five species)
- || Excellent baseline stability, minimal span drift
- || Linearity better than 1% over 4 orders of magnitude
- || No interference from H₂O and CO₂
- || Direct, simultaneous measurement of NO and NO₂
- || Multi-range SO₂ with accuracy better than 0.25 ppm
- || Optional O₂ measurement
- || Available in Wall Mount or Rack Mount versions
- || Ethernet connectivity

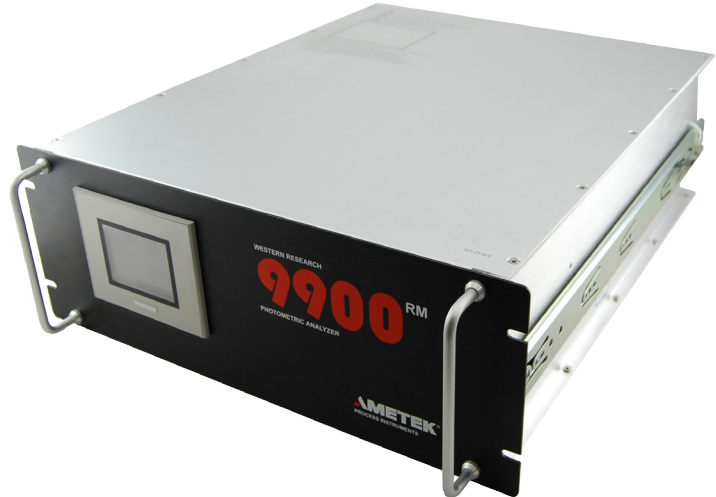

checks. Both analog and digital outputs are available and serial communications via Modbus protocol. An optional paramagnetic oxygen sensor can be included to provide O₂ corrected concentrations.

When your requirement is for a rugged, single or multi-gas analyzer, free of interferences from water and CO₂, the Model 9900^{RM} is your answer.

The Measurement


The Western Research® Model 9900^{RM} uses AMETEK's proprietary high resolution UV technology in a dual beam, multiple wavelength configuration. Resolution is better than 0.02nm, while high intensity, fixed-wavelength, line source lamps emit low total power to reduce the potential for sample photolysis. The high resolution enables unparalleled

The Analyzer


The new Model 9900^{RM} is a single or multi-component gas analyzer that can be used alone or as an integrated part of a CEM (continuous emissions monitoring) system. The analyzer is 19" rack-mountable and supports Modbus/RS485 and Ethernet connectivity.

The Model 9900^{RM} can be configured to measure most gas species that absorb in the UV. Species typically measured directly by the Model 9900^{RM} include: SO₂, NO, NO₂, H₂S, COS, CS₂, NH₃, and BTX. Up to five components can be measured simultaneously making the system very economical for multi-component analysis needs.

The simple and robust design of the Model 9900^{RM} is complemented by powerful data processing capabilities. The user-friendly keyboard enables programming of such variables as timing and frequency of local zero and span

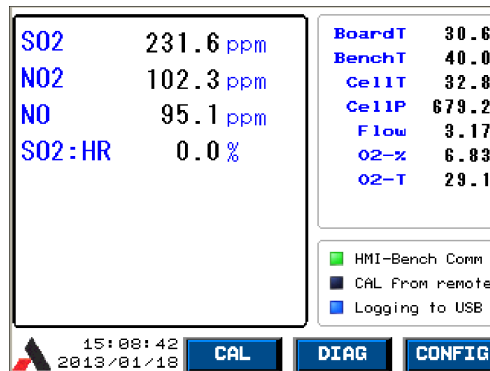

Model 9900^{RM} Home screen display

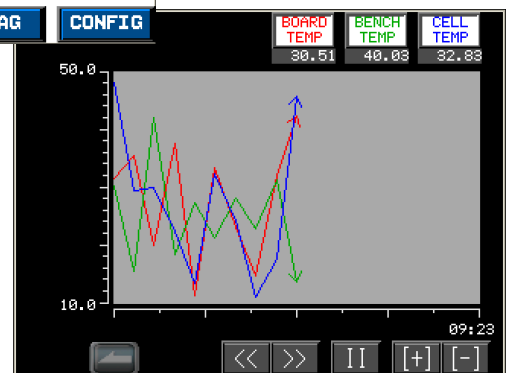

Model 9900^{RM} Trend graph display

Model 9900^{RM} Gas Analyzer

linearity over a wide dynamic range (less than 1% deviation over four to five orders of magnitude) which, in turn, leads to simple, robust data analysis. Furthermore, the analyzer can be configured to measure nearly any gas species that absorbs energy in the UV range, including NOx, H₂S, and SO₂. Onboard processing includes extensive diagnostics, data logging, graphing and trending, plus

programming of timing, frequency of local zero and span checks, and more.

A six-position filter wheel enables one reference and five measure wavelengths. The dual beam configuration, combined with the reference measurement, ensures low noise performance with minimal baseline and span drift. The five measure wavelengths enable the direct measurement of up to five

species. Therefore, NO and NO₂ can be measured separately and simultaneously without the need for complex sample conditioning and free of quenching effects.

The Model 9900^{RM} can also be configured to measure SO₂ on two different ranges, enabling accuracy better than 1% of reading within the range 100 ppm to 2%.

Performance Specifications

Species Measured	Single Species	Multi-Species
	Minimum Full Scale	Minimum Full Scale
SO ₂	10 ppm	20 ppm
H ₂ S	50 ppm	100 ppm
NO	50 ppm	200 ppm*
NO ₂	100 ppm	200 ppm*
NOx	n/a	200 ppm*

* Low range applications require full sample matrix information.

Maximum full scale on all systems: 100%

Methodology: Multiple wavelength, high resolution, non-dispersive ultraviolet

Optional O₂: Integral paramagnetic sensor

Accuracy:

Better than 1.0% of standard full scale range

O₂: ±0.1%

Repeatability:

±0.5% full-scale of standard ranges
O₂: ±0.2% (reading varies by 0.05% due to A/D resolution)

Linearity:

SO₂: < ±1.0% full-scale
NO, NO₂, NOx, H₂S: < ±1.5% full-scale

O₂: ±0.1%

Response Time:

90% in 30 seconds or less

Number of Gases:

1 (single species version)
Up to 5 (multi-species version)

Typical Sample Flow:

0.25 - 5 l/min (0.6 - 10.5 SCFH)

Sample Gas Requirements: Non-corrosive, non-condensing, free from oil and with less than three micron particulates (0-95%, non-condensing)

Sample System Limits: 40 psig max, 5 psig with optional O₂ module

Pressure and Temperature Compensation: Optional

Flow Indication: Optional
0-5 LPM/0-10 LPM

Ambient Conditions:

Storage: -20 to 60°C (-4 to 140°F)
Operating: 0 to 50°C (32 to 122°F)
0.95 Relative Humidity

Zero Drift: Typically better than 2% full scale standard ranges in 24 hours

Utility Requirements

Electrical:
120 or 240 VAC ±10%, 47 to 63 Hz
Power Consumption:
< 200 W maximum start-up (from a cold start) with average power dependant on ambient temperature

Communications:

Modbus RTU RS485 and optional Modbus TCP
Fast Ethernet - network connection or web-based server

Physical Dimensions (W x H x D):

48.2 cm x 17.7 cm x 60.256 cm
(19 in. x 7 in. x 23.7 in.)
Weight: 18.2 kg (40 lb)

Outputs:

Four isolated Analog Outputs, each configurable to 0-20 mA, 4-20 mA, 0-5V DC, 1-5V DC

One configurable relay contact, Form A (SPST), normally open.
Switching: maximum 240 V DC, 0.5 A DC, limited to 10 W. Carry: maximum 1.2 A DC

Inputs:

Two isolated analog inputs, 0-5 Volts or 0.5 mA.

Approvals and Certifications:

Ordinary Locations Approvals:
CAN/CSA-C22.2 NO. 61010-1-12, with UL 61010-1 and ANSI/ISA-61010-1 (82.02.01)
CAN/CSA-C22.2 NO. 60529-05 (R2010) IP20
CAN/CSA-C22.2 NO. 94.1-07 (R2012) with NMJ-J-235/1-ANCE-2007 and UL 50

Certifications Pending:
Hazardous Locations Approvals:
CAN/CSA-C22.2 NO. 60079-0:11 UL 60079-0
CAN/CSA-C22.2 NO. 60079-15:12 UL 60079-15
C22.2 NO. 213-M1987 (R2008)
ANSI/ISA 12.12.01-2011
Class I Div 2 Groups A, B, C, D
Ex nA IIC T4
Class I Zone 2 AEx nA IIC T4
IEC/EN 61326
CE Marking
(47 CFR 15) FCC
(ICES-0003) Industry Canada - CAN
ICES-3 (A)/NMB-3(A)

AMETEK[®]
PROCESS INSTRUMENTS

2876 Sunridge Way N.E., Calgary, AB T1Y 7H9
Ph. +1-403-235-8400, Fax +1-403-248-3550
www.ametekpi.com



© 2014, by AMETEK, Inc.
All rights reserved. Printed in the U.S.A.
F-0406 Rev 3 (0914)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.
Specifications subject to change without notice.

SALES, SERVICE AND MANUFACTURING:

USA - Pennsylvania
150 Freeport Road, Pittsburgh PA 15238 • Tel: +1-412-828-9040, Fax: +1-412-826-0399

USA - Delaware
455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

Canada - Alberta
2876 Sunridge Way N.E., Calgary AB T1Y 7H2 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

WORLDWIDE SALES AND SERVICE LOCATIONS:

USA - Houston, Texas
Tel: +1-713-466-4900, Fax: +1-713-849-1924

BRAZIL
Tel: +55 19 2107 4100

CHINA
Beijing / Tel: +86 10 8526 2111, Fax: +86 10 8526 2141
Chengdu / Tel: +86 28 8675 8111, Fax: +86 28-8675 8141
Shanghai / Tel: +86 21 6426 8111, Fax: +86 21 6426 7818

USA - Austin, Texas
Tel: +1-512-252-2440, Fax: +1-515-252-2430

FRANCE
Tel: +33 1 30 68 89 20, Fax: +33 1 30 68 89 99

GERMANY
Tel: +49 21 59 91 36 0, Fax: +49 21 59 91 3639

INDIA
Tel: +91 80 6782 3200, Fax: +91 80 6782 3232

SINGAPORE
Tel: +65 6484 2388, Fax: +65 6481 6588

WESTERN RESEARCH[®]