

# Model 909 Hot/Wet Single Gas Mass Flow CEM

## Benefits

- || High reliability and reduced maintenance requirements through a no-moving-parts design
- || Hot/wet analysis prevents errors associated with:
  - Correcting for water vapor
  - Absorption losses in driers
- || Accuracy better than 2.5 ppm SO<sub>2</sub>
- || Able to measure SO<sub>2</sub>, NO, NO<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, or a number of other chemicals
- || No H<sub>2</sub>O or CO<sub>2</sub> interference
- || Automated zero and span gas calibration
- || Provides serial interface with plant DCS
- || Incorporates flow measurement for emission rate calculations

## The Need

The AMETEK Western Research® Model 909 is a single gas version of our Model 910 Continuous Emissions Monitor. The analyzer is specifically configured for monitoring stack emissions on a mass rate basis. It measures stack effluent temperature and velocity in addition to pollutant concentrations at stack conditions enabling mass emission rates to be reported. With the addition of an optional zirconium oxide sensor, the Model 909 is capable of monitoring oxygen.

The Model 909 features a no-moving-parts design for maximum reliability and durability. It is a complete system with a sample extraction and transport system designed to ensure sample integrity. Housing options for the analyzer include a cabinet or walk-in shelter built to your specifications.

The Model 909 performs all necessary sample gas and calibration

gas flow management, and probe and sample line temperature control. The Model 909 is a full function continuous emissions monitoring system (CEM) which requires the addition of only a sample probe and sample line to be fully operational.


## The Measurement

The Model 909 uses our proprietary high resolution UV technology in a dual beam, dual wavelength configuration. Resolution better than 0.02 nm is provided by high-intensity line source lamps. These sources emit at fixed wavelengths providing great measurement stability and emit low total power removing the potential for sample photolysis. The high resolution enables unparalleled linearity over a wide dynamic range, which in turn, leads to simple, robust data analysis. The dual beam configuration, combined with the reference measurement, ensures low noise performance with minimal baseline and span drift.

UV measurements do not suffer from H<sub>2</sub>O and CO<sub>2</sub> interference as these species are transparent in the UV. This greatly simplifies sample handling. The Model 909 is a fully extractive, heated wet basis analyzer. The sample cell and all components in contact with the sample are heated above the dew points of all gases in the sample stream. This results in a simpler and more accurate calculation of gas concentrations requiring no corrections for condensed and dissolved components. It also results in a simpler, more reliable analytical system as there is no need for sample drying. The Model 909 has built-in zero and span calibration and four zone temperature control.

## Applications

- || CEM applications in:
  - Sulfur plants
  - Smelters
  - Coal, oil and gas-fired power plants
  - Industrial boilers and process heaters

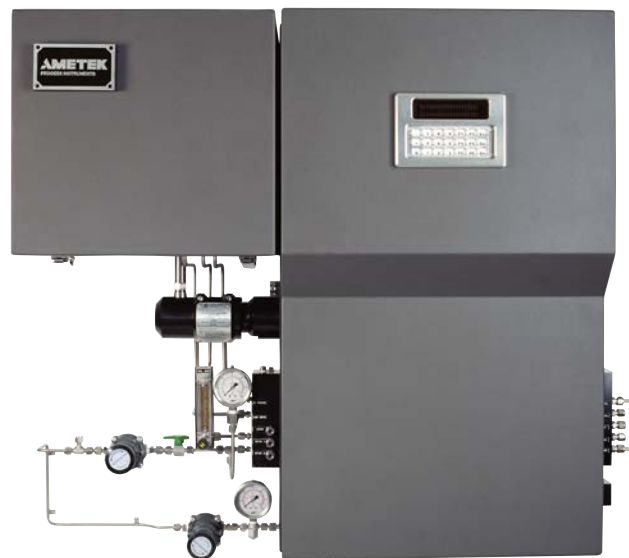

Model 909 Hot/wet Single Gas Mass Flow CEM

# Model 909 Hot/Wet Single Gas Mass Flow CEM

## Performance Specifications

**Methodology:** Dual beam, high resolution, nondispersive UV

Species Measurable	Minimum Full Scale†	Maximum Full Scale
SO <sub>2</sub>	250 ppm	100%
NO	300 ppm	100%
NO <sub>2</sub>	300 ppm	100%
H <sub>2</sub> S	500 ppm	100%
NH <sub>3</sub>	125 ppm	100%
Cl <sub>2</sub>	500 ppm	100%

† Minimum full scale is based on ±1% full scale accuracy over 24 hours with auto zero disabled.

**Optional O<sub>2</sub>:** Integral zirconium oxide

**Accuracy:** Better than ±1% full scale of standard ranges

**Repeatability:** Better than ±0.5% full scale of standard ranges

**Linearity:** Better than ±1% of full scale

**Response Time:** Typically less than 30s to T90 (excludes sample system)

**Sample Transport:** Air aspiration

**Typical Sample Flow:** 3 to 5 L/min (0.1 to 0.2 CFM)

**Temperature Control:** Independent control of three zones (oven, sample line, probe)

**Pressure and Temperature Compensation:** Standard

**Ambient Temperature\*:** 5° to 50°C (41° to 122°F)

**Instrument Air:** Minimum 413.6 KPa (60 psig), 120 L/min (4.24 CFM), instrument quality air

**Power:** 120 VAC ±10%, 47 to 63 Hz or 240 VAC ±10%, 47 to 63 Hz, 600 W for analyzer only

**Communications:** Analog: 4 x 4 to 20 mA self powered

Digital: One RS232 port for service diagnostics

One RS422 with Modbus protocol

Relays: 3 independent sets of SPDT relays alarm conditions

**Physical Dimensions HxWxD:**

1553.6 x 1117.6 x 306 mm  
(61.17 x 44 x 12 in.)

**Weight:** Estimated minimum 160 kg (350 lbs.)

**Approvals and Certifications:**

NEC/CEC Class I, Division 2, Groups C & D

ATEX II 2 G Ex d e px IIB T3 Gb


IECEx Ex d e px IIB T3 Gb

Russian Ex Proof Certification; 1ExpydIIBT3

Russian Gosstandart Pattern Approval

Complies with all relevant European Directives

\* Temperature drift is approximately 1 ppm/°C for the species listed. To achieve maximum accuracy and stability, the analyzer should be installed in a temperature-controlled environment or be zeroed more frequently.

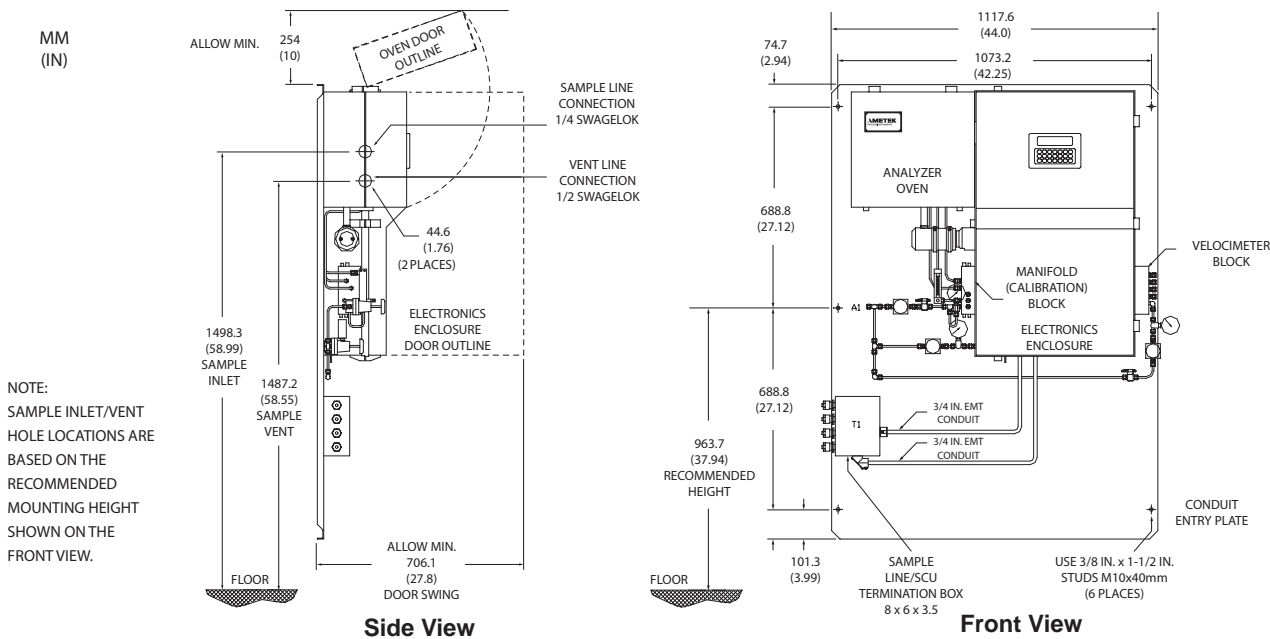

**AMETEK®**  
PROCESS INSTRUMENTS

2876 Sunridge Way N.E., Calgary, AB T1Y 7H9  
Ph. +1-403-235-8400, Fax +1-403-248-3550  
www.ametekpi.com



© 2014, by AMETEK, Inc.  
All rights reserved. Printed in the U.S.A.  
F-0175 Rev 5 (0815)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.  
Specifications subject to change without notice.

### SALES, SERVICE AND MANUFACTURING:

**USA - Pennsylvania**  
150 Freepoint Road, Pittsburgh PA 15238 • Tel: +1-412-828-9040, Fax: +1-412-826-0399

**USA - Delaware**  
455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

**Canada - Alberta**  
2876 Sunridge Way N.E., Calgary AB T1Y 7H2 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

### WORLDWIDE SALES AND SERVICE LOCATIONS:

**USA - Houston, Texas**  
Tel: +1-713-466-4900, Fax: +1-713-849-1924

**BRAZIL**  
Tel: +55 19 2107 4100

**CHINA**  
Beijing / Tel: +86 10 8526 2111, Fax: +86 10 8526 2141  
Chengdu / Tel: +86 28 8675 8111, Fax: +86 28-8675 8141  
Shanghai / Tel: +86 21 6426 8111, Fax: +86 21 6426 7818

**FRANCE**  
Tel: +33 1 30 68 89 20, Fax: +33 1 30 68 89 99

**GERMANY**  
Tel: +49 21 59 91 36 0, Fax: +49 21 59 91 3639

**INDIA**  
Tel: +91 80 6782 3200, Fax: +91 80 6782 3232

**SINGAPORE**  
Tel: +65 6484 2388, Fax: +65 6481 6588

WESTERN RESEARCH®